

Quick-release clamping ring

for use with flanged sealing ring for connecting pipes with wall thicknesses of 1,2 and 3mm




Material

1.0038 electrically galvanized
1.4301 stainless steel

Profile



Seal



Flanged sealing ring,
leakage-free
see p.26-31


DN nominal width	Inner diameter A	Screw DIN912	Material thickness	Weight
80	86	M8 x 60	1,5	0,247
90	96	M8 x 60	1,5	0,254
100	106	M8 x 60	1,75	0,306
112	118	M8 x 60	1,75	0,320
120	126	M8 x 60	1,75	0,329
125	131	M8 x 60	1,75	0,335
140	146	M8 x 60	1,75	0,353
150	156	M8 x 60	1,75	0,364
160	166	M8 x 60	1,75	0,376
175	181	M8 x 60	1,75	0,393
180	186	M8 x 60	1,75	0,399
200	206	M8 x 60	1,75	0,423
224	230	M8 x 60	1,75	0,450
250	256	M8 x 60	1,75	0,481
280	286	M8 x 60	1,75	0,516
300	306	M8 x 60	1,75	0,539
315	321	M8 x 60	1,75	0,557
350	356	M8 x 60	1,75	0,597
355	361	M8 x 60	1,75	0,603
400	406	M8 x 60	1,75	0,656
450	456	M8 x 60	1,75	0,714
500	506	M8 x 60	1,75	0,772
550	556	M8 x 60	1,75	0,831
560	566	M8 x 60	1,75	0,842
600	606	M8 x 60	1,75	0,889
630	636	M8 x 60	1,75	0,924

Versions in
steel 1.0038,
electrically galvanized
stainless steel 1.4301

i The ESKATE quick-release clamping ring can be opened or closed quickly, easily and without aids thanks to its quick-release latch and redesigned fixed joint. In addition, this clamping ring can be tightened when closed. As a result, it is very easy to assemble.

i Very short lead times due to all year round availability from stock. Custom and non-standard factory sizes available on request

Minimum order value: Net goods value of 40.00 euros. The prices do not include VAT, packaging and forwarding. All dimensions in mm. All weights in kg. Subject to errors and alterations.

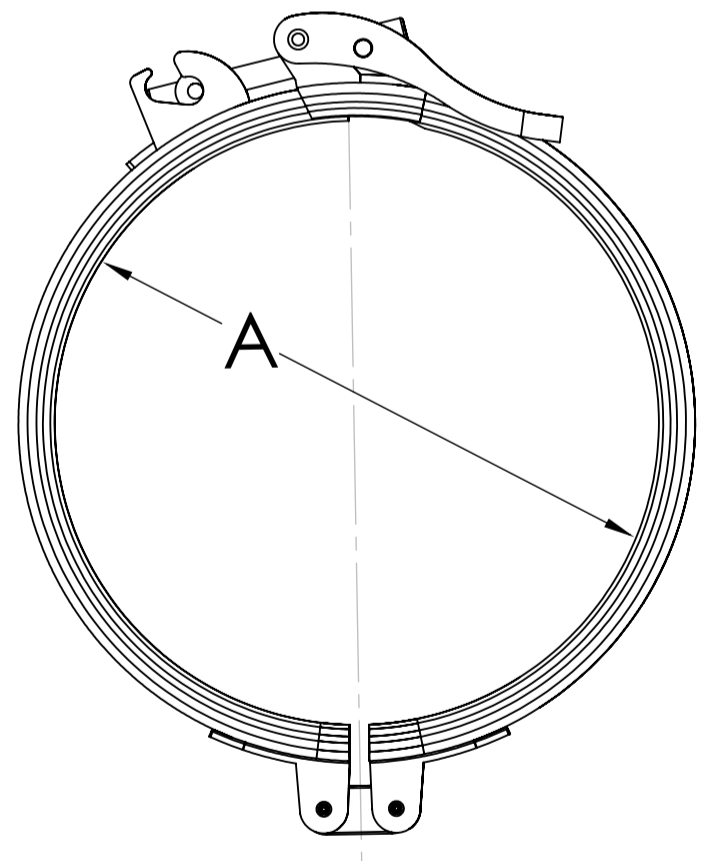

Explosion shock-proof up to 3 bar

We would be pleased to advise you on your individual terms and designs. Just give us a call.
✉ info@eskate.de ☎ +49 5734 66 66 6