

# Safe & Solid clamping ring with safety catch

for use with flanged sealing ring for connecting pipes with wall thicknesses of 1, 2 and 3mm




## Material

1.0038 electrically galvanized  
1.4301 stainless steel

## Profile



## Seal



Flanged sealing ring, leakage-free see p. 26–31

DN nominal width	Inner diameter A	Screw DIN912	Material thickness	Weight
100	106	M8 x 60	2	0,247
112	118	M8 x 60	2	0,254
120	126	M8 x 60	2	0,306
125	131	M8 x 60	2	0,320
140	146	M8 x 60	2	0,329
150	156	M8 x 60	2	0,335
160	166	M8 x 60	2	0,353
175	181	M8 x 60	2	0,364
180	186	M8 x 60	2	0,376
200	206	M8 x 60	2	0,393
224	230	M8 x 60	2	0,399
250	256	M8 x 60	2	0,423
280	286	M8 x 60	2	0,450
300	306	M8 x 60	2	0,481
315	321	M8 x 60	2	0,516
350	356	M8 x 60	2	0,539
355	361	M8 x 60	2	0,557
400	406	M8 x 60	2	0,597
450	456	M8 x 60	2	0,603
500	506	M8 x 60	2	0,656
550	556	M8 x 60	2	0,714
560	566	M8 x 60	2	0,772
600	606	M8 x 60	2	0,831
630	636	M8 x 60	2	0,842

**Versions in**  
**steel 1.0038,**  
**electrically galvanized**  
**stainless steel 1.4301**

**i** The ESKATE SAFE & SOLID clamping ring combines the maximum possible security with fast assembly and is your first choice if you value stability, security and quick assembly. It has an especially large bearing area on the pipe and thus aligns the pipe ends. This ensures flawless media feed-through at the pipe connections. Moreover, additional inert-gas shielded welding makes the SAFE & SOLID even more secure.

Furthermore, the ESKATE SAFE & SOLID clamping ring can be supplied with a safety catch that secures the latch against unintentional opening. As a result, the clamping ring provides even more security. Not least, the ESKATE SAFE & SOLID clamping ring is very easy to assemble thanks to its quick-release latch and can be attached and removed from the pipe very quickly. Due to the varied design options, we offer the perfect clamping ring for almost every application with the ESKATE SAFE & SOLID clamping ring. Different systems and profiles can be combined with the latch - including your individual clamping ring profile and even beyond the nominal width of 630mm.


**i** Very short lead times due to all year round availability from stock. Custom and non-standard factory sizes available on request

*Minimum order value: Net goods value of 40.00 euros. The prices do not include VAT, packing and forwarding. All dimensions in mm. All weights in kg. Subject to errors and alterations.*



Increased security thanks to the additional safety catch.

Explosion blast-proof certified for:  
NW 100–400mm at 4,5 bar  
NW 450–630mm at 1,5 bar

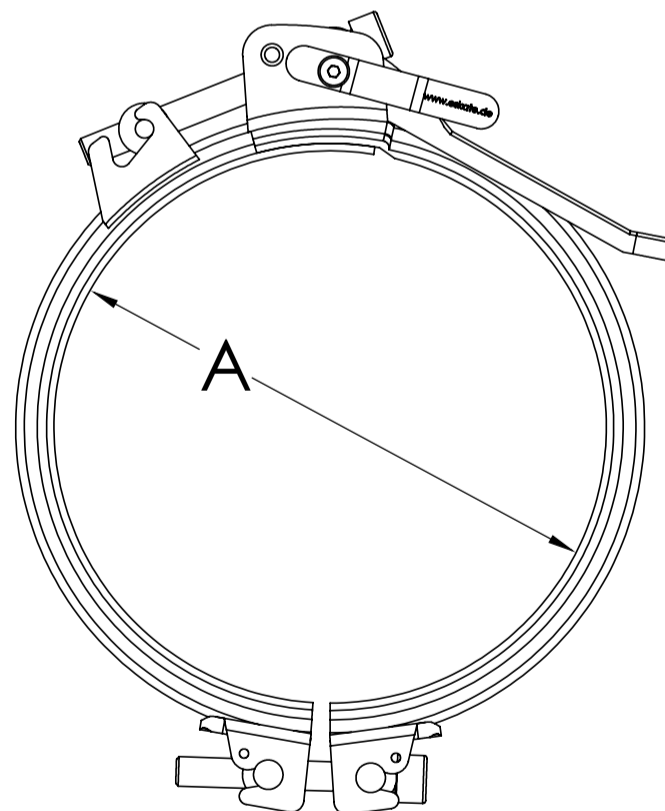

**We would be pleased to advise you on your individual terms and designs. Just give us a call.**  
✉ info@eskate.de ☎ +49 5734 66 66 6